


VERY COST EFFECTIVE SIGNAGE WITHOUT TOTAL REDESIGN DESIGN YOUR OWN SIGN AND SAVE HUNDREDS OF DOLLARS

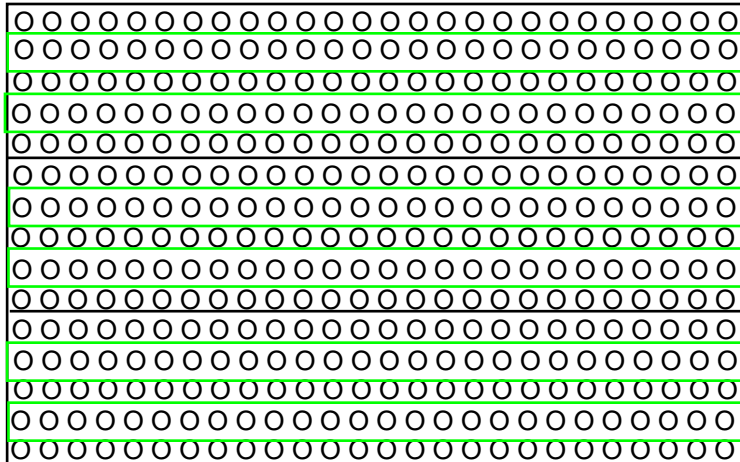

Steelspan can provide 1/8 aluminium pegboard sheet in a range of anodised colors.

with 1/4 inch THREADED polycarbonate pegboard underlayment

using 1/2 X 1/2 polycarbonate bolts for lettering(BYO)

In a 36" x 24" x 3" Hinged Door Aluminum Enclosure

NO EXTERNAL DRIVERS NEEDED

OPTIONAL EXTERNAL DRIVER FOR DIMMABLE APPLICATIONS

USES 6-- TWO FOOT LED TUBES FOR TOTAL WATTAGE OF 60 WATTS

TUBES ARE MOUNTED ON UNIQUE CLAMP SYSTEM FOR ANGLE ADJUSTMENT OF TUBES

USES PTCR AND MOV UNIT FOR SURGE PROTECTION

OPTIONAL BATTERY BACKUP WITH NICKEL-IRON BATTERIES FOR LONG LIFE

OPTIONAL SOLAR PANEL/WIND TURBINE CHARGING SYSTEM FOR REMOTE SIGNAGE