Luminaire Schedule							
Symbol	Qty	Label	Arrangement	Lumens/Lamp	LLF	Total Watts	Description
	5	OSQ 4ME-2 @ 90 DEGREES		22705	1.000	2230	OSQ-A-NM-4ME-S-57K-UL-BZ

Footcandles calculated using initial lumen values					
Label	Avg	Max	Min	Avg/Min	Max/Min
Parking Lot	4.58	9.1	1.4	3.27	6.50

POLE SCHEDULE:
(5) CL-SSP-4007-25-OT-BZ (25' x 4" STEEL SQUARE POLE, 7ga)
(10) OSQ-AABZ (Adjustable Arm Mount)
(5) - PB-2A4 - (Twin Tenon)

PROPOSED POLES MEET 120 MPH SUSTAINED WINDS

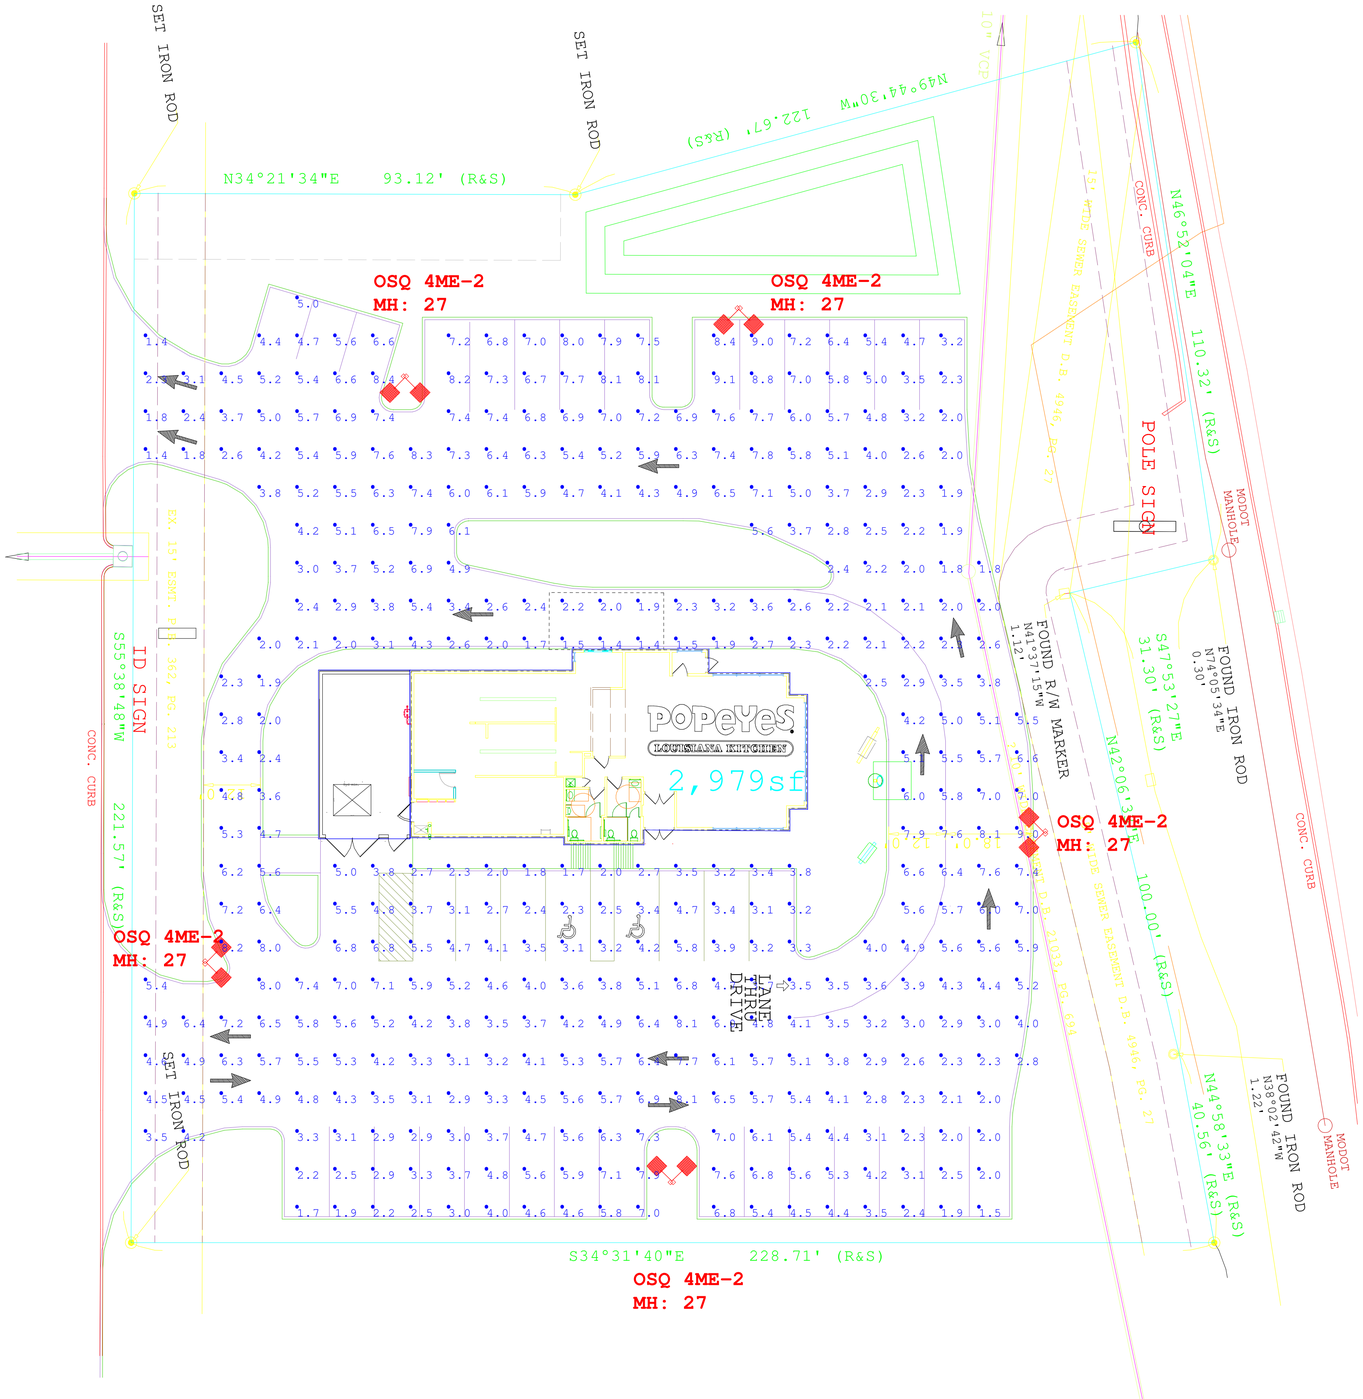

OSQ Area Luminaire

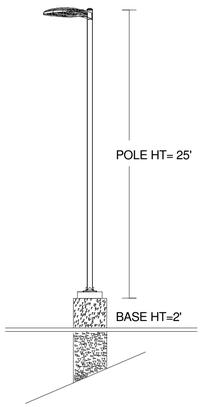

0 32 64

Customer responsible to verify ordering information/ catalogue number prior to placing order.

CREE™

1200 92nd Street - Sturtevant, WI 53177
www.cree.com - (800) 236-6800

Project Name: Popeye's - Bridgeton, MO
Salesforce:SR-12704
Date:2/26/2016
Scale: 1"=16'
Footcandles calculated at grade
Filename: S:\S-NAT\POP-160226BRMOCJW.AGI
Layout by: Collin Witherow

Illumination results shown on this lighting design are based on project parameters provided to Cree, Inc. used in conjunction with luminaire test procedures conducted under laboratory conditions. Actual project conditions differing from these design parameters may affect field results. The customer is responsible for verifying dimensional accuracy along with compliance with any applicable electrical, lighting, or energy code.