THE DEDICATED POS POWER CIRCUIT REQUIRES AN ISOLATED GROUND IN ADDITION TO THE NORMAL COMMON BUILDING GROUND. THE ISOLATED GROUND WIRE SERVES TWO PURPOSES:

* AS A SAFETY PATH TO GROUND.

* AS A ZERO REFERENCE POINT FOR ALL POS DIGITAL LOGIC.

THE GROUND MUST EXHIBIT THE LOWEST POSSIBLE IMPEDANCE TO MINIMIZE VOLTAGE TRANSIENTS AND NOISE.

BE SURE TO:

* USE AN INSULATED CONDUCTOR FOR THE ISOLATED GROUND WIRE.

* RUN THE ISOLATED GROUND WIRE THROUGH THE SAME CONDUIT AS THE HOT AND NEUTRAL WIRES.


* INSTALL ONLY ISOLATED GROUND (IG) TYPE RECEPTACLES.

* CONNECT THE ISOLATED GROUND WIRE TO BUILDING GROUND ONLY AT THE MAIN SERVICE PANEL.

* VERIFY THAT IG RECEPTACLES PRE-WIRED IN OWNER SUPPLIED EQUIPMENT HAVE A TRUE ISOLATED GROUND THAT CAN BE TRACED BACK TO THE BUILDING GROUND AT THE MAIN SERVICE PANEL.

DO NOT CONNECT THE ISOLATED GROUND WIRE TO THE CONDUIT, JUNCTION BOXES, THE FRAME ON A SUBPANEL, OR ANY OTHER METAL SURFACE.

DEDICATED CIRCUITS: DEDICATED CIRCUITS REQUIRE A DEDICATED HOT AND A DEDICATED NEUTRAL THAT ARE NOT SHARED WITH ANY OTHER CIRCUITS. IG RECEPTACLES MUST BE "PHASE ALIGNED" WITH THE "B" PHASE OF BUILDING SUBPANEL "A".

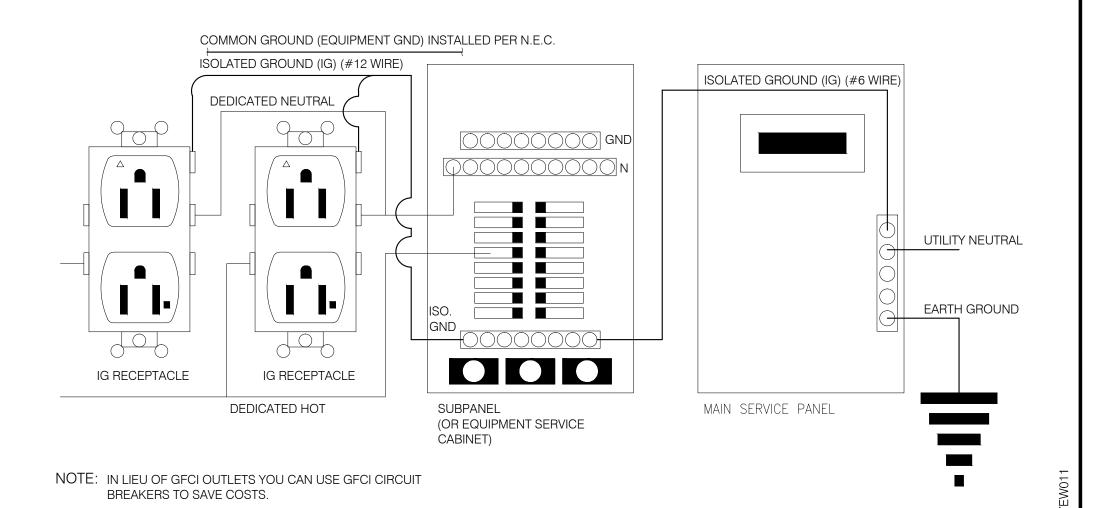

P.O.S. ISOLATED GROUND SYSTEM N.T.S. 14

ENLARGED INTERIOR ELEVATION (D/T WINDOW) 1/2" = 1'-0" 16

SUPPORT SECURITY BUTTON ON WALL N.T.S. 5 — DATA WIRE. TAPE IN PLACE WITH ALUM. APE UNDER COUNTER & WHITE ELEC TAPE ON WALL - HINGED BUTTON COVER COUNTER TOP SUPPORT FLUSH DATA WALL BOX

COUNTER

SECURITY

- DATA WIRE

COVER

- FLUSH DATA


WALL BOX

COUNTER TOP

CONCEALED

- HINGED BUTTON

TOP

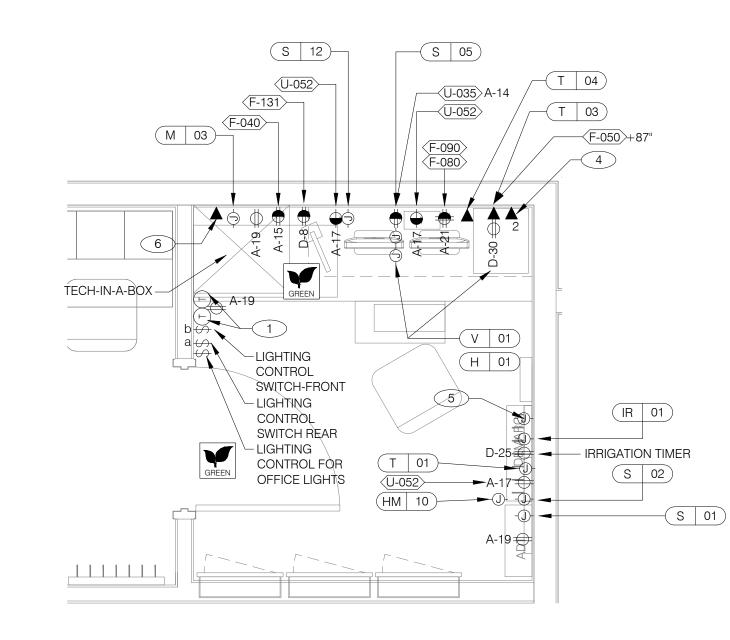

kathleen day, architec 8535 ferry roa waynesville, oh 45068 6 | 7 . 3 3 | . 2 5 4 kathleendayarchitect@gmail.co

ENGINEER:

BRIAN EDWARD CHANDLER, PE

1431 GREENWAY DRIVE SUITE 510 IRVING, TX 75038 PHONE: 972.870.1288 E-MAIL: bchandler@idstudio4.com



ZONING COMMENTS 05.20.16

ENLARGED POWER AND COMMUNICATIONS PLAN (OFFICE) 1/2" = 1'-0" 3

GFCI CIRCUIT BREAKERS.

NOT USED N.T.S. 8

1 THERMOSTATS CONTROLS. 2 DISPLAY UNIT FOR HM-02. 3 DUAL-OUTPUT DETECTOR FOR HM-02. 4 PHONE JACK FOR MODEM. 5 LOCATION OF FAN & LIGHT CONTROL BOX. COORDINATE EXACT LOCATION IN FIELD. 6 DATA JACK FOR TECH-IN-A-BOX WITH 2 PORTS

7 ALL CIRCUITS LOCATED BELOW 3'6"AFF SHALL BE PROVIDE WITH

CONTRACT DATE: BUILDING TYPE:LIVE MAS-Medium 40

PLAN VERSION: REV P ~ NOV '15 SITE NUMBER: STORE NUMBER:

TACO BELL

770 National Road Wheeling, WV 26003



MEDIUM 40

ENLARGED POWER PLAN AND DETAILS

KEY NOTES N.T.S. A

