


POPEYES FRYER STATION PLUMBING WITH HEAT TRACE

~ INSIDE OR OUTSIDE TANK APPLICATION ~

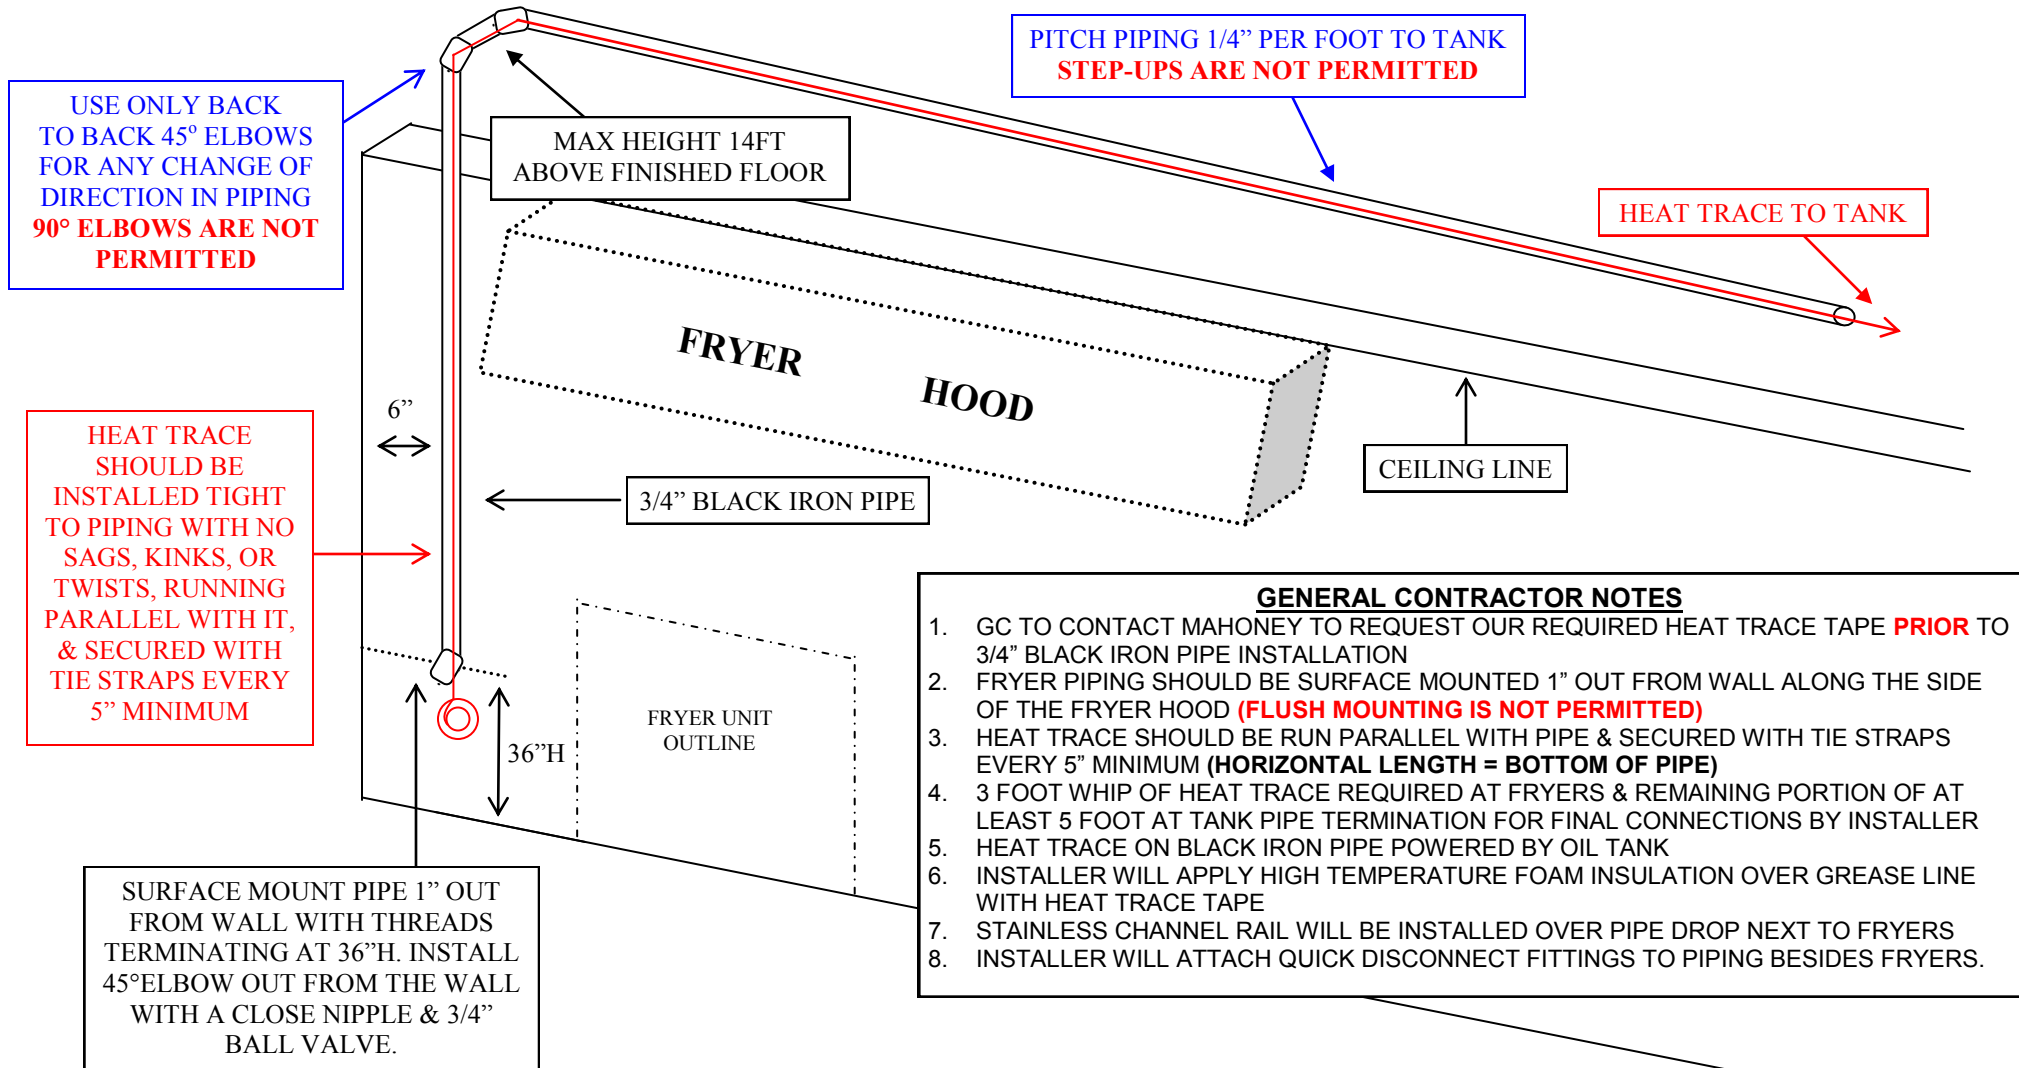

GENERAL CONTRACTOR NOTES

1. GC TO CONTACT MAHONEY TO REQUEST OUR REQUIRED HEAT TRACE TAPE **PRIOR** TO 3/4" BLACK IRON PIPE INSTALLATION
2. FRYER PIPING SHOULD BE SURFACE MOUNTED 1" OUT FROM WALL ALONG THE SIDE OF THE FRYER HOOD (**FLUSH MOUNTING IS NOT PERMITTED**)
3. HEAT TRACE SHOULD BE RUN PARALLEL WITH PIPE & SECURED WITH TIE STRAPS EVERY 5" MINIMUM (**HORIZONTAL LENGTH = BOTTOM OF PIPE**)
4. 3 FOOT WHIP OF HEAT TRACE REQUIRED AT FRYERS & REMAINING PORTION OF AT LEAST 5 FOOT AT TANK PIPE TERMINATION FOR FINAL CONNECTIONS BY INSTALLER
5. HEAT TRACE ON BLACK IRON PIPE POWERED BY OIL TANK
6. INSTALLER WILL APPLY HIGH TEMPERATURE FOAM INSULATION OVER GREASE LINE WITH HEAT TRACE TAPE
7. STAINLESS CHANNEL RAIL WILL BE INSTALLED OVER PIPE DROP NEXT TO FRYERS
8. INSTALLER WILL ATTACH QUICK DISCONNECT FITTINGS TO PIPING BESIDES FRYERS.

**REQUIRED COMMERCIAL GRADE HEAT TRACE TAPE:
PART # HT-1111-8 - HEAT TAPE
TO REQUEST SHIPMENT CALL
MAHONEY 1-800-892-9392**

**FRYER'S FILTER MACHINE
IS THE DRIVING FORCE
THAT PUSHES USED OIL
INTO THE TANK**

MAHONEY ENVIRONMENTAL **DC CONNECTION**
Fryer Oil Recycling Equipment & Solutions

1819 Moen Avenue
Joliet, IL 60436
800-892-9392 (Toll-Free)
815-730-2087 (Fax)
www.mahoneyes.com

Project Manager
Patrick Darin
815-272-2140
patrickd@mahoneyes.com

REV: 07/01/2015

CONFIDENTIAL—DO NOT DISTRIBUTE