




HAVING JURISDICTION.

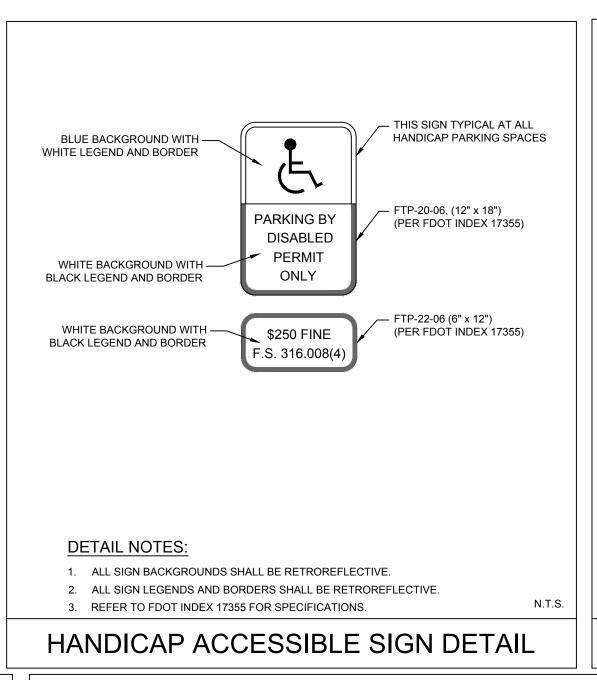

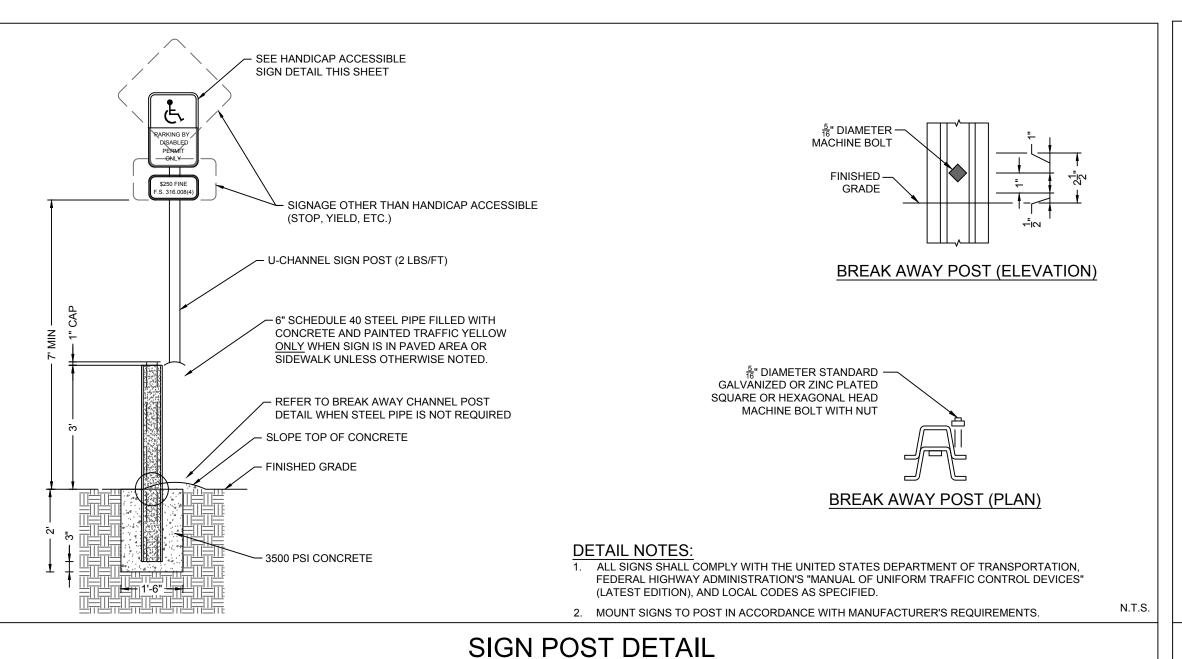

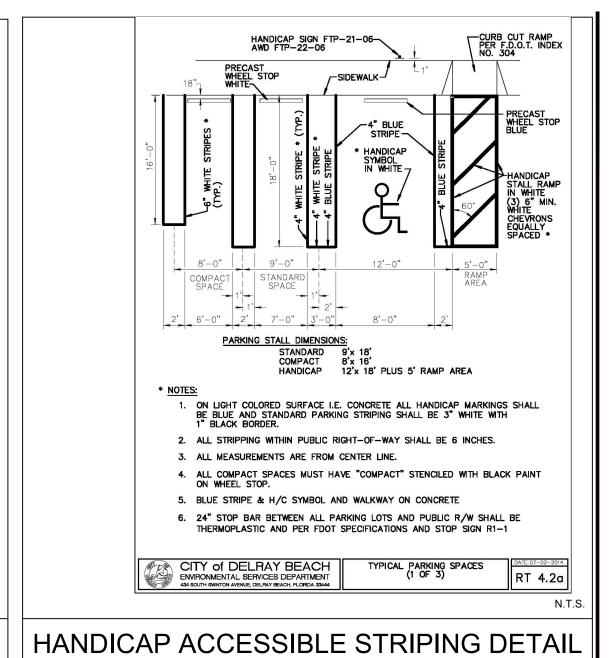

ALL PAVEMENT MARKINGS

RAISED PAVEMENT MARKERS

OTHER NOTES

All paved surfaces shall be properly marked prior to the


centerlines, spaced at 20' or 40'.

R.P.M.s shall be installed on all lane lines and


R.P.M.s shall be a 4 x 4 type class "B" marker


R.P.M.'s shall be installed using alkyd thermoplastic on asphalt and epoxy on concrete.


meeting F.D.O.T. specifications and shall be approved by the City Engineer prior to use.

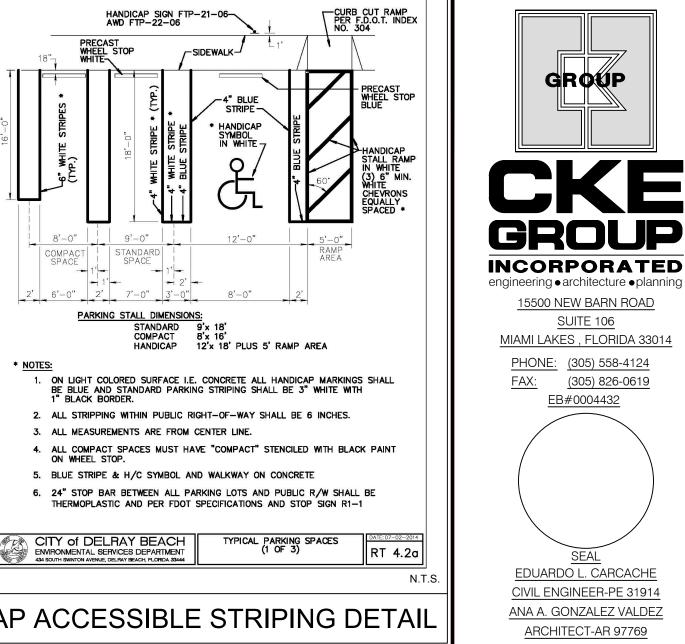




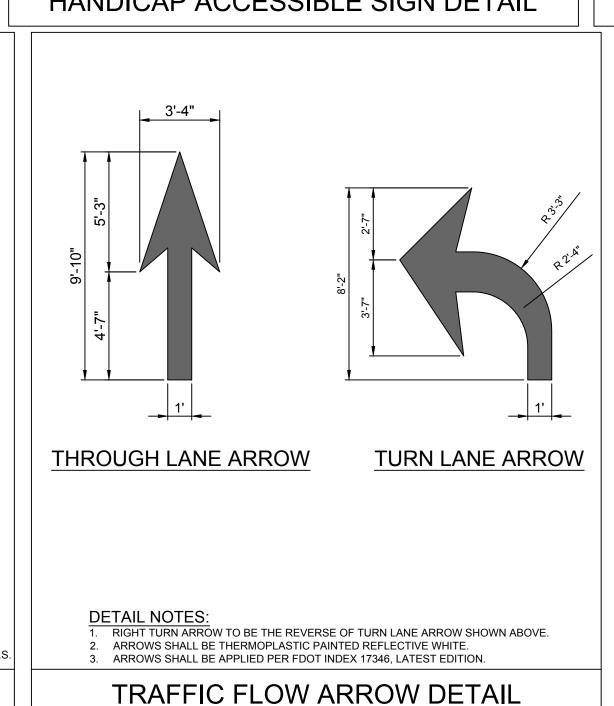


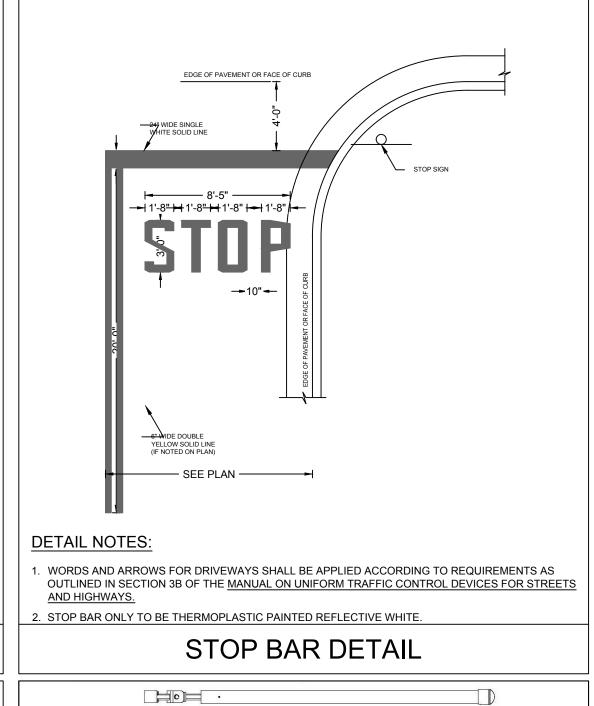


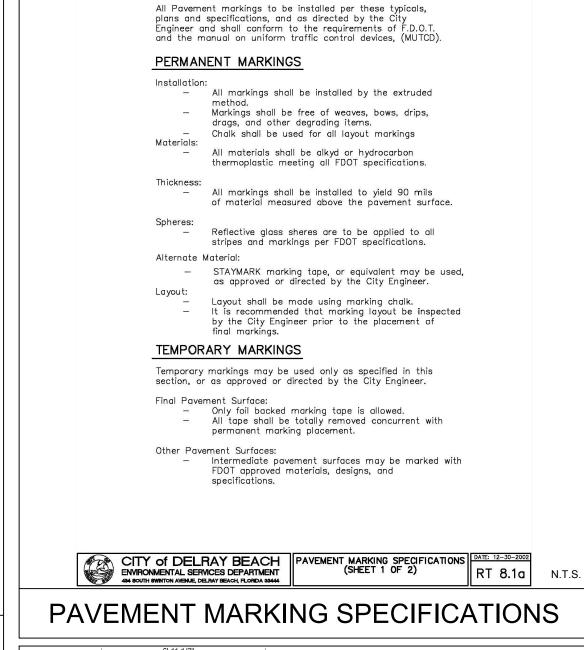

PAVEMENT MARKING SPECIFICATIONS

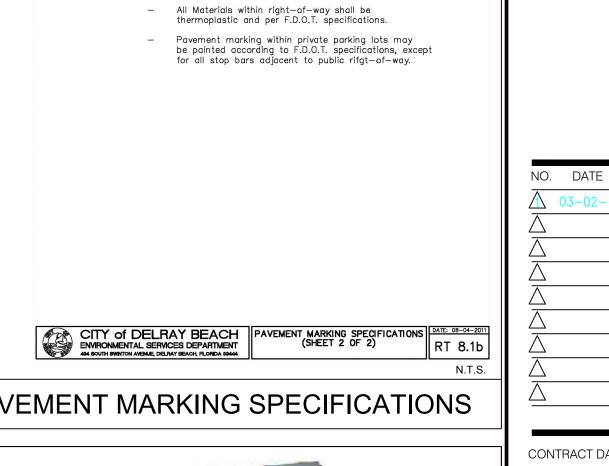

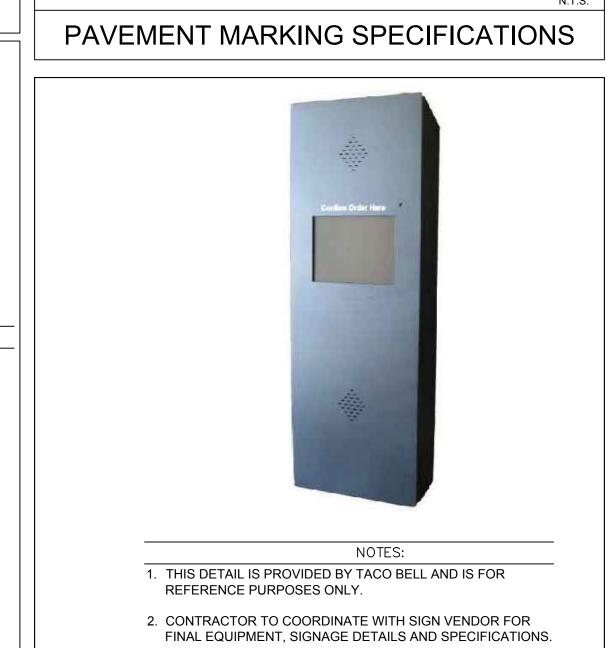

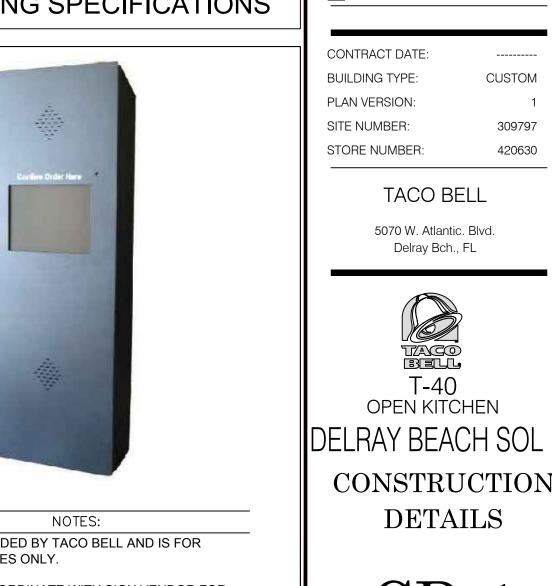

DESCRIPTION

420630

PLOT DATE: 07-26-2018

