

ShawContract®

Terrain II 30 Mil


Collection	Terrain II	
Style Number	0892V	
Construction	Heavy Commercial Luxury Vinyl Tile	
Class / ASTM F1700	Class III, Type B	
Finish	ExoGuard+™	
	U.S.	Metric
Nominal Dimensions	6 in w x 48 in l	15 cm w x 122 cm l
Actual Dimensions	5.96 in w x 48.00 in l	15.14 cm w x 121.92 cm l
Wear Layer Thickness	30 mil (0.03 in)	0.76 mm
Overall Thickness	0.118 in	3 mm
Edge Profile	Squared Edge	
Installation Type	Dry Back	
Installation	Direct Glue	
Recommended Adhesive	LOKWORX+ RESILI, LG4100 4G, 4151, S150-95 or LOKWORX+ RESILI	



Packaging

Pieces per Carton	18 pcs	
Area per Carton	35.76 sq ft	3.32 sq m
Weight per Carton	38 lbs	17.24 kg

Recommended Installation Method

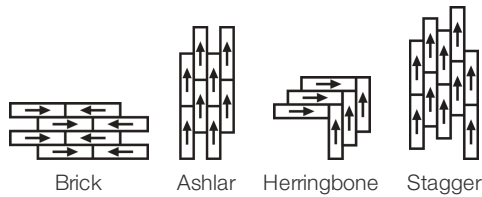

Coordinating Products

LVT: Terrain II 12 Mil, Terrain II 20 Mil, Terrain II 20 Mil 5 Mm

COREtec: Terrain II Coretec

Performance + Testing

Static Load (ASTM F970)	Passes (Modified), *1500 lbs	*This test is intended to compare relative properties of different styles and constructions. Results are based on a laboratory test and used for comparative purposes - real life load limit may vary.
Residual Indentation (ASTM F1914)	Passes	
Resistance to Heat (ASTM F1514)	Passes	
Resistance to Light (ASTM F1515)	Passes	
Resistance to Chemicals (ASTM F925)	Passes	
Smoke Density (ASTM E662, Flaming Mode)	Passes	
Radiant Panel (ASTM E648)	Passes, Class I	
Coefficient of Friction (ASTM D2047, Slip Resistance)	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes	
Repetitive Traffic Scratch Test	No to Slight Change	

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

- [15 Year Commercial Limited Warranty](#)
- [Commercial Limited Underbed Bond Shaw 4100, S150 Or Shaw 4151](#)

Product Transparency

Shaw Contract is dedicated to providing clients with a building chemistry that's safe and dependable. Working together, we will help you meet your goals as they pertain to material health. Luxury Vinyl Tile products are UL Certified with an Industry-Wide EPD and are assessed for impacts on human health and the environment.

Attributes + Certifications

Health Product Declaration (HPD)	1000 ppm Disclosure
Environmental Product Declaration (EPD)	3rd Party Certified in Accordance with ISO 14025, EN 15804, & ISO 21930:2017
FloorScore®	Certified
GSA	Approved
CE Marking (EN 14041)	3rd Party Certified
Total Recycled Content	30% (Pre-Consumer 30% Post-Consumer 0%)
Country of Origin	United States

LEED Contribution Credit

MR Credit: Building Product Disclosure and Optimization	RFCi Industry Average EPD (50%)
Environmental Product Declarations - Option 1: Environmental Product Declaration	
EQ Credit: Low Emitting Materials	FloorScore Certified
Option 1: Product Category Calculations	

- [Installation Guidelines](#)
- [Maintenance Guidelines](#)

Please visit www.shawcontract.com for the most current warranty information. Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

