


WIRED. G.C. TO PROVIDE J-BOX ABOVE CEILING CENTERED BETWEEN BOARDS.

MAIN MENUBOARD ROUGH-IN ELEVATION

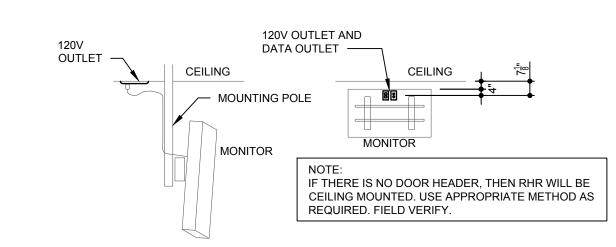

REDHEAD ROASTER (RHR) POWER MONITOR SCHEMATIC

20 AMP 120V-1PH HUBBELL #USB20X2BK RECEPTACLE 20 AMP QUADRUPLEX 120V-1PH

- J JUNCTION BOX
- * = A-H AS COOKLINE JUNCTION BOXES REFER TO DETAIL #3 ON SHEET E4.2 HUBBELL # USB20X2W (QTY 2)
- 20 AMP 120V-1PH SIMPLEX RECEPTACLE
 20 AMP 120V-1PH HUBBELL #IG5362 +16" AFF OR AS NOTED 20 AMP 120V-1PH DUPLEX RECEPTACLE 20 AMP QUAD HUBBELL #IG5362 (QTY 2) +16" AFF OR AS NOTED 20 AMP 120V-1PH GROUND FAULT INTERRUPTING RECEPTACLE

ELECTRICAL LEGEND

- 20 AMP 120V-1PH WEATHERPROOF RECEPTACLE R 20 AMP 120V-1PH RECESSED RECEPTACI F RECEPTACLE
- SPECIAL RECEPTACLE, SEE KITCHEN EQUIPMENT SCHEDULE DISCONNECT SWITCH BY ELECTRICAL CONTRACTOR DISCONNECT SWITCH SUPPLIED WITH

ISOLATED GROUND RECEPTACLE

ISOLATED GROUND RECEPTACLE

- 120V-1PH QUADRUPLEX RECEPTACLE TELEPHONE CONNECTION ▼ TELEPHONE/DATA CONNECTION
- APPLICABLE. THERMOSTAT, TEMPERATURE SENSOR AND HUMIDISTAT BY MECHANICAL CONTRACTOR

✓ DATA CONNECTION

PARTIAL CIRCUIT

HIS 3 1 HOME RUN TO PANEL.

RT REMOTE TEST STATION (54")

CIRCUIT NUMBERS, PHASE,

CONDUCTORS INDICATED

ALONG WITH ISOLATED

GROUND CONDUCTOR IF

NEUTRAL & GROUND

EQUIPMENT & CONNECTIONS

		LOAD		VOLTAGE				CONNECTIONS			FEE	DER		
CIRCUIT	DESCRIPTION	HORSEPOWER	KILOWATTS	120V-IPH	208V-1PH	208V-3PH	120/208V-1PH	TYPE	PLUG CORD *	CONDUCTORS *	WIRE SIZE	GROUND SIZE	CONDUIT SIZE	NOTES
(E)	DRIVE THRU FREESTYLE		.7	0				EXIST. RECEPTACLE	ES	2	12	12	3/4"	EXISTING
(E)	POS MONITOR/TERMINAL		.3	0				RECEPTACLE	(E)					
(E)	POS MONITOR/TERMINAL		.3	0				RECEPTACLE	(E)					
(E)	BEVERAGE DISPENSER		.4	0				RECEPTACLE	ES	2	12	12	3/4"	EXISTING
			-	0				-	-	-	-	-	-	
	MENUBOARD		1.5	0				DIRECT	EC	2	12	12	3/4"	
	REDHEAD ROASTER		.5	0				DIRECT	EC	2	12	12	3/4"	
(E)	D.T. ICE MAKER		2.5		0			WP DISC SWITCH @ UNIT	ES	3	10	10	3/4"	
(E)	BEVERAGE DISPENSER		1.4	0				RECEPTACLE	ES	2	12	12	3/4"	
(E)	BEVERAGE ICE MAKER		2.5		0			WP DISC SWITCH @ UNIT	ES	3	10	10		
(E)	DOUBLE SIDED GRILL		15.9			0		RECEPTACLE NEMA 15-60	EC	3	6	10	1- <u>1</u> "	
(E)	DOUBLE SIDED GRILL		12.8			0		RECEPTACLE NEMA 15-50	EC	3	6	10	1- 1 "	

ES /EQUIPMENT SUPPLIER
* EC /ELECTRICAL CONTRACTOR

** CONDUCTOR QUANTITY DOES NOT

INCLUDE GROUND WIRE

GENERAL NOTES

- A. REFER TO "WIRING AND SITE PREPARATION GUIDE" AS PREPARED BY 'WENDY'S INTERNATIONAL "INFORMATION SYSTEMS DEPARTMENT" FOR INSTALLATION OF POINT OF SALE CASH REGISTER SYSTEM.
- B. ELECTRICAL CONTRACTOR TO COORDINATE WORK WITH MECHANICAL, REFRIGERATION AND EQUIPMENT CONTRACTORS, INCLUDING COOLER/FREEZER WORK. (IF APPLICABLE)
- C. ELECTRICAL CONTRACTOR TO VERIFY ALL ROUGH-IN DIMENSIONS AND POWER REQUIREMENTS WITH

KITCHEN EQUIPMENT DISTRIBUTOR PRIOR TO ROUGH-IN.

- D. ELECTRICAL CONTRACTOR TO HOOK UP FIELD CONNECTIONS WITHIN FRONT COUNTER, AND ICE MACHINE
- REMOTE UNIT (ON ROOF) AT TIME OF INSTALLATION.
- E. HEIGHTS INDICATED FOR RECEPTACLES AND JUNCTION BOXES ARE MEASURED FROM FINISH FLOOR TO THE CENTER OF THE BOX UNLESS OTHERWISE NOTED.
- F. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR INSTALLING ALL TELEPHONE LINES AND TERMINATIONS. VERIFY QUANTITY AND LOCATIONS WITH OWNER PRIOR TO BIDDING.
- G. ALL CIRCUITS MAY BE CORRECTED TO THE LEAST AMOUNT OF CONDUIT RUN UNLESS OTHERWISE NOTED.
- H. ALL COVER PLATES TO BE SATIN FINISH STAINLESS STEEL THROUGHOUT UNLESS OTHERWISE NOTED.
- ALL NEW 120V RECEPTACLES IN KITCHEN TO HAVE GROUND-FAULT CIRCUIT INTERRUPTER PROTECTION. OTHER GFI'S SHOWN SEPARATELY.
- J. FOR THE IBM POINT OF SALE REGISTER SYSTEM ONLY: ALTERNATE P.O.S. SUPPLIERS MUST CONFORM TO THE REGISTER LAYOUT OR PROVIDE THE OWNER AND/OR GENERAL CONTRACTOR WITH WIRING DIAGRAMS AND INSTALLATION DETAILS BEFORE THE ELECTRICAL CONTRACTOR STARTS ANY WORK.
- K. ALL CONDUITS SHOULD BE STEEL FLEX OR PLASTIC STUBBED OUT ABOVE THE CEILING LINE AND TERMINATED INTO A J-BOX AS NOTED AND CAPABLE OF ACCEPTING A FACEPLATE COVER.
- ALL J-BOXES SHOULD BE INSTALLED IN SUCH A WAY THAT THEY ARE NOT BLOCKED BY OTHER EQUIPMENT OR STRUCTURAL COMPONENTS.
- M. ALL IG OUTLETS (HUBBELL IG5362 ORANGE OR EQUAL) MUST BE CLEARLY LABELED.
- N. ALL CABLE ACCESS OPENINGS THRU S/S MUST HAVE RUBBER OR PLASTIC GROMMETS INSTALLED.
- O. THE ELECTRIC SERVICE FOR THE GFI OUTLET/SCOREBOARD MUST BE ON A SEPARATE BREAKER (NOT CONNECTED TO THE MENU BOARD OR OUTSIDE LIGHT FEED).
- P. HEIGHTS INDICATED FOR RECEPTACLES AND J-BOXES ARE MEASURED FROM FINISH FLOOR TO THE CENTER OF BOX. U.N.O.
- Q. EXISTING ENERGY MANAGEMENT SYSTEM TO REMAIN AND BE FULLY OPERATIONAL AT COMPLETION OF REMODEL.
- R. ALL CUSTOMER ACCESSIBLE RECEPTACLES MUST BE TAMPER RESISTANT

× CODED NOTES:

- CIRCUIT TO EXISTING 20A, 120V, SPARE CIRCUIT BREAKER AS INDICATED ON PLANS IN EXISTING PANELBOARD (FIELD VERIFY). VERIFY THAT THE ADDITIONAL LOAD DOES NOT OVERLOAD EXISTING PANELBOARD OR ANY UPSTREAM ELECTRICAL DEVICE.
- ALL EXISTING ELECTRICAL DEVICES, CONDUIT, WIRING, AND EQUIPMENT IN THIS AREA AND ON ROOF TO REMAIN, UNLESS NOTED OTHERWISE. MAINTAIN AND PROTET EXISTING BRANCH CIRCUITS.
- PROVIDE POWER AND DATA FOR STATIC MENUBOARDS. PROVIDE CIRCUITING TO MENU BOARDS IN SERVING AREA VIA LIGHTING CONTACTOR. DESIGN INTENT IS FOR MENU BOARDS TO BE CONTROLLED ON AND OFF WITH GENERAL LIGHTING IN THIS AREA.
- 4. PROVIDE CEILING MOUNTED DUPLEX RECEPTACLE AND DATA FOR DIGITAL RHR MONITOR. SEE RHR POWER MONITOR SCHEMATIC DETAIL ON THIS SHEET.
- PROVIDE POWER AND DATA FOR QUEUING BOARDS. PROVIDE CIRCUITING TO QUEUING BOARDS IN SERVING AREA VIA LIGHTING CONTACTOR. DESIGN INTENT IS FOR QUEUING BOARDS TO BE CONTROLLED ON AND OFF WITH GENERAL LIGHTING IN THIS AREA.

SITE NUMBER: 02011 **BUILDING TYPE:** CG3480 ASSET TYPE: **FREESTANDING CLASSIFICATION:** REFRESH OWNER: STARBOARD BASE VERSION: 2021 SPRING

UPGRADE CLASSIFICATION:

PROJECT YEAR: 2022 DESIGN TYPE: (2.0) UM BRIGHT DRAWING RELEASE: 2021 SPRING





STARBOARD GROUP 12540 W. ATLANTIC BLVD. CORAL SPRINGS, FL 33071 OFFICE: (954)255-2266

ISSUE DATE: 11/18/2021 PROJECT NUMBER: 2120430

DRAWN BY: MS/BS CHECKED BY: AR/CF



POWER PLAN